

# The Power of the PFC for Medical Applications

#### **MAC Valves Proportional Flow Control**

### THE PRECISION OF THE STEPPER MOTOR TECHNOLOGY



**High precision** 

Accurate response times

Low hysteresis



### THE POWER OF THE LBV & BULLET VALVE



High repeatability

**Accurate response times** 

**High flow flexibility** 

Wide range of gases & liquids

Low leak performance



HIGH PRECISION PROPORTIONAL FLOW CONTROL

## BENEFITS OF THE MAC PROPORTIONAL FLOW CONTROL (PFC) IN LIQUID DISPENSING ALREADY USED IN THE INDUSTRY

- ✓ Customized calibration available with optional driver circuit
- √ Food grade modification on request
- ✓ Very high flexibility in manifold footprint
- √ Small size for a better integration
- ✓ Drop-in solution

MAC Valves - Highly engineered solutions for the highest performing applications since 1948



MAC Valves Inc, Wixom, Michigan - MAC Valves Inc, Dundee, Michigan MAC Valves Europe Inc, Liège, Belgium - MAC Valves Asia Inc, Taiwan

To find your local distributor, visit www.macvalves.com



EN-MVE006-ME - PFC.indd 1 19-10-18 14:00:29

#### TECHNICAL DATA\*


	Proportional Flow Control		
Function:	2-way		
Туре:	Cartridge style - Balanced design		
Command:	4 to 20 mA - 0 to 10 VDC (with optional driver circuit)		
Manifold mounting:	Very flexible cartridge style		
Media:	Liquids / fluids D-Flex™ (MAC patented diaphragm technology)		

<sup>\*</sup>Tested as per the conditions described in the MAC Valves standard test procedures, assembly instructions and modification. The values mentioned are valid exclusively for a new valve tested at ambient temperature (20°C).

Stepper motor quickly and precisely controls fluid flow through the Bullet Valve® maintaining application requirements.


#### MAC PROPORTIONAL FLOW CONTROL - LINEARITY

The very low hysteresis cycle of the MAC PFC guarantees a constant flow through the PFC for opening or closing signal.

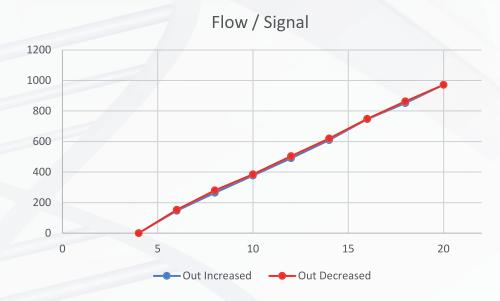

	ml/min at 2 Bar	
Signal	Out incr.	Out decr.
4	0	0
6	146.4	153.4
8	264.6	280.2
10	377	385.4
12	490.8	504.2
14	609.8	620.4
16	746.4	748
18	851.2	863.2
20	971.8	

Note: Above values result from trials and are for illustration purposes only - Flow and calibration can be adapted to customer requirements.









3500 factory certified specialists in over 45 countries focused on optimizing customers needs

MAC Valves Inc, Wixom, Michigan - MAC Valves Inc, Dundee, Michigan

MAC Valves Europe Inc, Liège, Belgium - MAC Valves Asia Inc, Taiwan

To find your local distributor, visit www.macvalves.com



I-MVE006-ME - PFC.indd 2